

PULSTAR PROFESSIONAL WIRELESS SOLUTIONS

Description: NMO, Tri Band 150-174/430-

520/750-870MHz

PART NUMBER: NMO150/450/758

Series: Tri Band Whip

**Patent Pending** 



# **Features:**

- Omnidirectional antenna
- Tri Band Monopole:
- VHF:150-174 MHz
- UHF: 430-520 MHz
- 7/800: 750-870 MHz
- · Flexible Spring, Impact Resistant
- Connector NMO (Pogo contact)
- IP67
- RoHS Compliant

# **Applications:**

- Motorola APX-8500
- · Harris Unity mobile

Issue: 1843

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: NMO, Tri Band 150-174/430-

520/750-870MHz

PART NUMBER: NMO150/450/758

**Series: Tri Band Whip** 

**Patent Pending** 

## **ELECTRICAL SPECIFICATIONS**

Antenna type Tri Band Monopole, Measured on

Ø52" (1.32m) Ground plane

Frequency 150-174/430-520/750-870 MHz

Nominal Impedance  $50 \Omega$ 

VSWR VHF: 150-165 MHz <2:1

VHF: 165-174 MHz <2.5:1 UHF: 430-490 MHz <2:1 UHF: 490-520 MHz <2.5:1

7/800: 750-870 MHz <2:1

Gain 0/5/4 dBi

Efficiency 60/70/70 %

Radiation Pattern Omni
Polarization Vertical

Power withstanding 100 W

Connector type NMO (Pogo contact)

# **MECHANICAL SPECIFICATIONS**

Color/Material Black / S.S Whip

Weight 205 g

Overall Length 452.5 mm

# **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature -40 ~ +85° C

RoHS Compliant Yes



Description: NMO, Tri Band 150-174/430-


520/750-870MHz

PART NUMBER: NMO150/450/758

**Series: Tri Band Whip** 

**Patent Pending** 

# **MECHANICAL DRAWING**

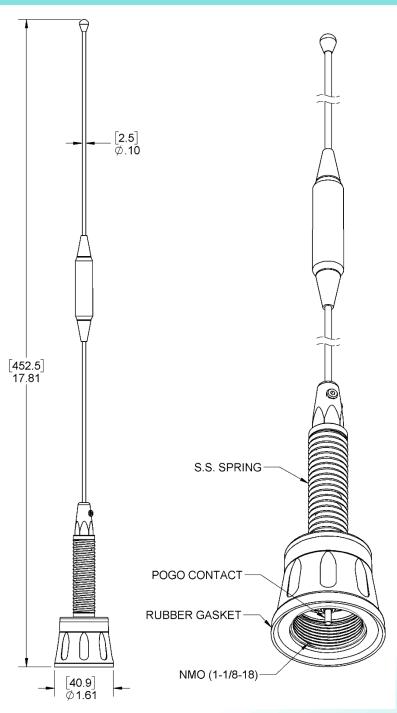

All dimensions are in mm / inches

Issue: 1843



Description: NMO, Tri Band 150-174/430-

520/750-870MHz

**PART NUMBER: NMO150/450/758** 


**Series: Tri Band Whip** 

**Patent Pending** 

# **CHARTS**

## VSWR vs Frequency NMO150450758 Measured with 17ft cable on Ø52" GP

Measured at Pulse, USA - June 11, 2018

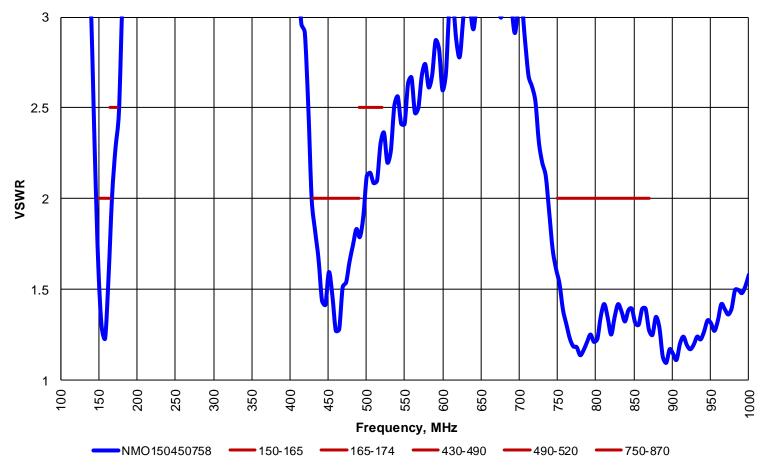







Description: NMO, Tri Band 150-174/430-

520/750-870MHz

PART NUMBER: NMO150/450/758


**Series: Tri Band Whip** 

**Patent Pending** 

Measured with 6" (152mm) cable


# **CHARTS**

#### **Peak Gain vs Frequency** NMO150450758

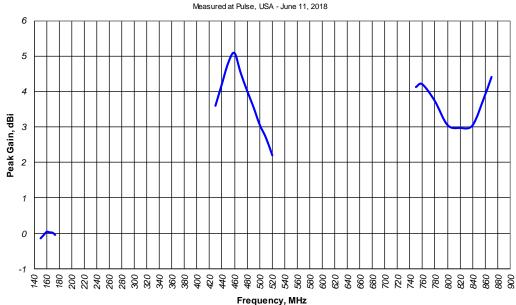

**—**150-174 **—**430-520 **—**750-870

#### Efficiency vs Frequency NMO150450758

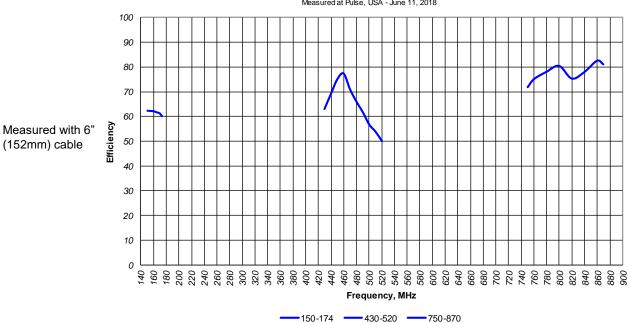

Issue: 1843



Description: NMO, Tri Band 150-174/430-


520/750-870MHz

PART NUMBER: NMO150/450/758

**Series: Tri Band Whip** 

**Patent Pending** 

# **CHARTS**

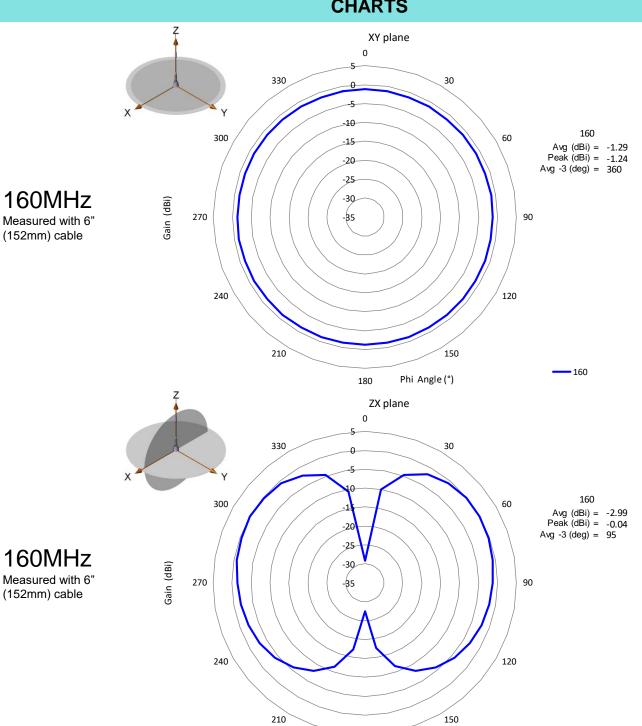

Issue: 1843

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

**-**160

180

Theta Angle (°)



Description: NMO, Tri Band 150-174/430-


520/750-870MHz

**PART NUMBER: NMO150/450/758** 

**Series: Tri Band Whip** 

**Patent Pending** 

# **CHARTS**

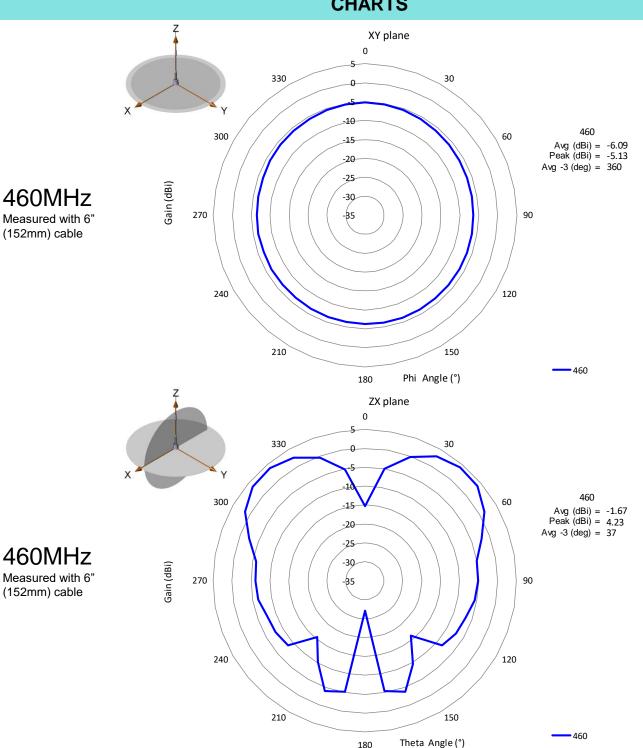

Issue: 1843

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



180



Description: NMO, Tri Band 150-174/430-

520/750-870MHz

**PART NUMBER: NMO150/450/758** 

Series: Tri Band Whip

**Patent Pending** 

# **CHARTS** XY plane 0 330 800 300 Avg (dBi) = 2.49Peak (dBi) = 2.80 -20 Avg - 3 (deg) = 360800MHz 270 90 -85 Measured with 6" (152mm) cable 240 800 Phi Angle (°) 180 ZX plane 0 330 30 800 300 Avg (dBi) = -1.58Peak (dBi) = 3.41Avg -3 (deg) = 37800MHz Measured with 6" 270 90 -85 (152mm) cable 240 120 210 150 800

Issue: 1843

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



180

Theta Angle (°)



Description: NMO, Tri Band 150-174/430-

520/750-870MHz

PART NUMBER: NMO150/450/758

**Series: Tri Band Whip** 

**Patent Pending** 

# **PACKAGING**

Pack each Antenna and instruction in PE bag.

